





HIDEAWAY CADDY

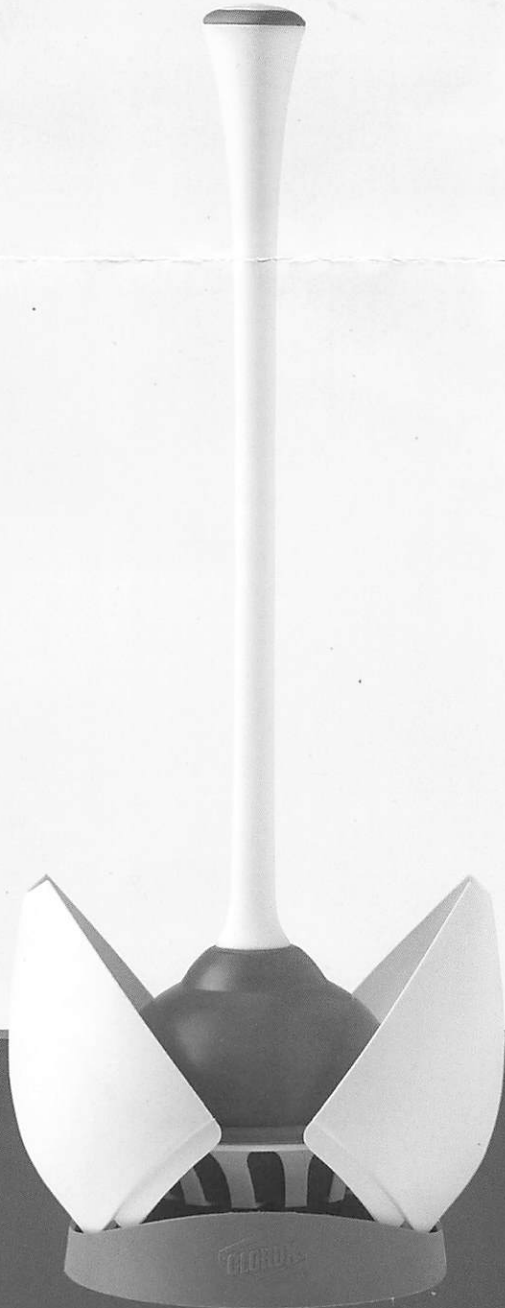


Clean is just the beginning™

ASSEMBLY



To assemble plunger, screw handle onto plunger head.

ASSEMBLY



1. Remove tape that secures hideaway flaps. Gently open flaps.
2. Place plunger inside caddy and flaps will close concealing plunger.
3. To remove from caddy, simply lift plunger by handle and caddy will open.

USAGE INSTRUCTIONS



1. Tilt plunger bell inside toilet bowl so that it fills with water.
2. Place flange directly over the toilet drain.
3. Gently press down to create a seal & suction.
4. Quickly and forcefully push plunger up and down.
5. Repeat as necessary until clog is cleared.

TRY OUR FAMILY OF QUALITY PRODUCTS



Clorox®
Bucket



Clorox® Everyday
Latex Gloves



Clorox® Tub &
Tile Scrubber



Clorox® Flex
Scrub Brush

Bradshaw Home
RANCHO CUCAMONGA, CA 91730
#620050
MADE IN CHINA

Toll Free Customer Support: 1-800-320-8045 | 9 a.m. - 5 p.m. EST
CLOROX® and the CLOROX® logo are trademarks of
The Clorox Company and may be registered. These marks
are used under license by Bradshaw Home.

WE VALUE YOUR FEEDBACK!



Thank you for your purchase!

We would like to hear how our product met your expectations. Please rate and submit a review for the product on its Amazon page as we work to improve our products and services to you.

amazon

